# Premium

# COW (Large)

## TRAILER SPECIFICATIONS

- Universal Mounting, Non-Skid Hot Dipped Galvanized Steel Grating Deck
- Hot Dipped Galvanized, Multiple Position Outriggers
- Traversing Axle Carriage (To Balance load Distribution)
- Electric Brakes, (Both Axles) With Emergency Break-Away
- Storage Boxes — Saddlebag (2), Tongue (1)
- Retractable Rear Approach Steps

### 18', 20', or 22' Trailers (DOT Compliant)

- 16,000-lb.— 20,000-lb. GVWR
- 10,000-lb. Tongue Jack, Conspicuity Markings
- 5,000-lb. Leveling Jacks (4), Adjustable Safety Chains
- 25,000-lb. 2-5/16" Ball Hitch with 5,000-lb. Tongue Load (Vertically Adjustable)

### 22', 24', or 26' Trailers (DOT Compliant)

- 22,000-lb.— 26,000-lb. GVWR
- 25,000-lb. Tongue Jack, Conspicuity Markings
- 7,000-lb. Leveling Jacks (4), Adjustable Safety Chains
- 35,000-lb Pintle Hitch with 7,000-lb. Tongue Load (Vertically Adjustable)

## CONFIGURATION OPTIONS

### Pneumatic Masts:

- 45' 800-lb. Payload Capacity (Proprietary Design)
- 60' 530-lb. Payload Capacity
- 59' 1,200-lb. Payload Capacity
- 76' 300-lb. Payload Capacity
- Guy Kit Included
- Protective Weather Cover Included

### Generators:

- 20 Kw 1-Phase, 3-Wire, 120/240 Volt
- 26 Kw 1-Phase, 3-Wire, 120/240 Volt
- 36 Kw 1-Phase, 3 Wire, 120/240 Volt
- 56 Kw 1-Phase, 3-Wire, 120/240 Volt
- Block Heater and Battery Charger Included

### Extended Run Fuel Cell:

- 24 Hour, 48 hour or As Required

### Equipment Cabinets:

**4-Bay, 5-Bay, 6-Bay or Custom**

- U.L.® Listed NEMA 3R Communications Cabinet
- 150 MPH Wind Load, 150-lb/sq. ft. Snow Load, 500-lb/sq. ft. Floor Load, Zone 4 Rated
- (2) 3.5-Ton HVAC Units with Lead-Lag Controller
- Universal Unistrut® Floor Grid System for Equipment Mounting
- Interior Lighting with Emergency Backup Ballast
- R56 Ground Ring, Main Ground Bar (Exterior) Equipment Ground Bar (Interior)
- 200 AMP 40 Position 1 Phase 3-Wire Distribution Panel
- Automatic Transfer Switch with MOV/SAD Surge Protector and Cam Locks for Alternate Source
- Internal & External GFI Service Receptacles
- Flexible Equipment Mounting Options with Ceiling Mounted Ladder Rack
- Polyester Powder Coat Paint Finish
- Fire Extinguisher, First-Aid & Eye Wash Kit Mounted on Telco Board
- 91" or 101" OSHA Compliant Crows Nest Mast Support Structure With Boarding Ladder

### Options/Add-ons:

- 1.8M Satellite Dish with Auto Acquisition Controller
- 3-Sector Antenna Mounting System
- Pan & Tilt Microwave Mount with Controller
- Mid-Level Microwave Mount
- Emergency Lighting Package, Flashers and Beacon

SUN WEST ENGINEERING, INC.®

3802 E. Broadway Rd. Phoenix, AZ 85040 Tel (602) 275-0662 Toll Free (800) 635-3658 WWW.SUNWESTENG.COM

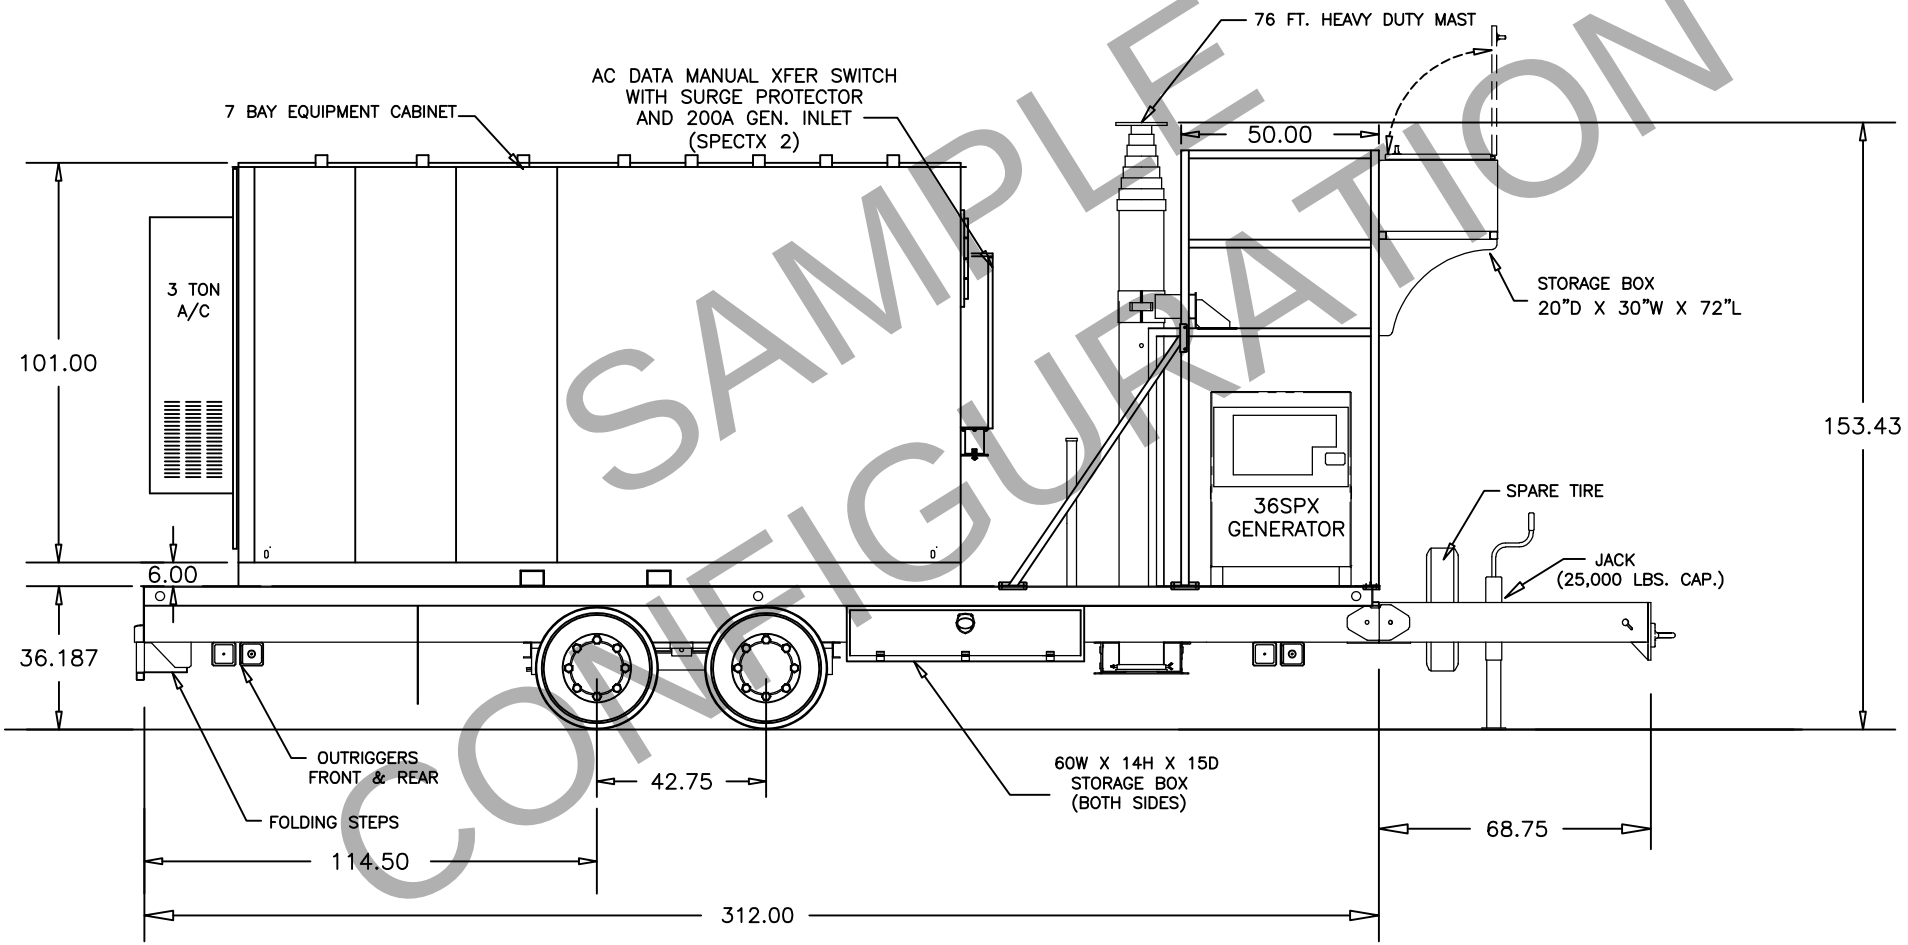


SAMPLE CONFIGURATION

PROPRIETARY PROPOSAL

** PROPRIETARY AND CONFIDENTIAL **
Copyright © 2014 Sun West Engineering, Inc.
THIS PROPOSAL CONTAINS TRADE SECRETS AND OTHER PROPRIETARY AND CONFIDENTIAL INFORMATION OF SUN WEST ENGINEERING, INC.
THIS DOCUMENTS AND IT'S CONTENTS, INCLUDING WITHOUT LIMITATION THE DRAWINGS AND OTHER INFORMATION HEREIN, ARE THE SOLE AND EXCLUSIVE PROPERTY OF SUN WEST ENGINEERING, INC.
ANY DUPLICATION, DISCLOSURE, OR USE OF ANY PORTION OF THIS DOCUMENT REQUIRES THE PRIOR WRITTEN CONSENT OF SUN WEST ENGINEERING, INC

SUN WEST ENGINEERING, INC.
3802 E. BROADWAY, PHOENIX, AZ 85040 (602) 275-0662

TITLE: 26 FT. HEAVY DUTY TRAILER WITH 7 BAY GARD EQP. CABINET

CUSTOMER:

| | |
|---|---|
| PLOT SCALE: .XXXX=1 | SHEET: 1 of 1 |
| DRAWN BY: HJM | DATE DRAWN: 1-23-10 |
| REVISED: | DWG. No. SW-3250 |